


# Azure Dynamics Electric Drive Solutions

## AC90 Motor with DMOC645 Controller

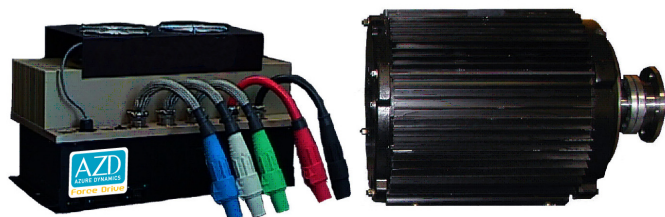

### Overview

The Azure Dynamics AC90 with DMOC645 Drive System features an Azure AC90 motor mounted in an axial design. Because of the linear layout, the drive unit fits into the area formerly occupied by the traditional drive shaft of delivery vans, trucks, etc., making vehicle conversions fast and easy.

### Applications & Features

In battery-EV applications, the AC90 and DMOC645 drives are designed for use in medium-duty trucks and buses weighing from 10,000 to 18,000 lbs. The motor is of a low-speed design for a typical 5-10:1 over-all vehicle drive ratio.

- AC induction motor
- Air-cooled
- High-efficiency brushless design
- Compact, lightweight construction
- Low rotating losses
- Low electrical resistance
- Cost effectiveness and high reliability
- Because it is used in conjunction with an Azure DMOC motor controller, the AC90 can function as an "electronic transmission," eliminating the need for a multi-speed gearbox in some applications, directly driving the vehicle's wheels with a fixed ratio.

### DMOC645 Digital Motor Controller

Azure's DMOC645 is a DSP-controlled, rugged, waterproof (except for cooling fans) inverter for controlling 3-phase AC motors and generators. Liquid-cooling is available.

- DSP-based control
- Regenerative braking
- Space Vector PWM and Field Oriented Control
- Internal contactor with pre charge circuitry
- Speedometer driver for some dashboard displays/gauges (such as VDO) and brake light enable
- Lightweight aluminum chassis
- Waterproof, rugged construction
- Intelligent Power Modules for high reliability
- Over voltage and under voltage protection
- Three-level over current protection
  - >10kHz DSP-based current control
  - >Analog over current watchdog
  - >"Instantaneous" over current protection from Intelligent Power Modules
- Inverter over temperature protection
- Motor over temperature protection
- Overspeed torque limit
- Invalid pedal signal detection
- RS232 – for diagnostics and data visualization
- CAN – for communications with other components

### Specifications

Peak Torque	Nm	665
Continuous Torque* at Nominal Speed	Nm	330
Nominal Speed	Rpm	1350
Maximum Mechanical Speed	Rpm	5000
Maximum Current	A rms	414
Continuous Shaft Power* at 1000-2500 rpm	kW	50
At a voltage of	VDC	312
Peak Efficiency	%	94
Peak Shaft Power	kW	97
At a voltage of	VDC	312
Weight AC90	Kg	189
Weight DMOC645	Kg	27.5
Diameter AC90	mm	394
Length AC90	mm	520
Length DMOC645	mm	585
Width DMOC645	mm	260
Height DMOC645	mm	310
Minimum Recommended Nominal Battery Voltage	VDC	312
Maximum Nominal Battery Voltage	VDC	336
Minimum Operational Voltage	VDC	100
Maximum Operational Voltage	VDC	400
Maximum Voltage "On Charge"	VDC	450
Minimum/Maximum Operating Temperatures	°C	-40 to 60

\*At 25 °C

System design and application affect performance. These specifications are guidelines to help facilitate system design and application and are not guaranteed in any particular application. All specifications are subject to change without notice.




*We drive a world of difference*

For further information on AZD's Force Drive Systems contact Beth Silverman, Sales Manager  
781.932.9009 Ext. 224 sales@azuredynamics.com or call toll free 877.932.9009

## AC90 Motor with DMOC645 Controller


### Torque-Speed Envelope

AC90 Speed vs. Torque  
600A peak, 312VDC

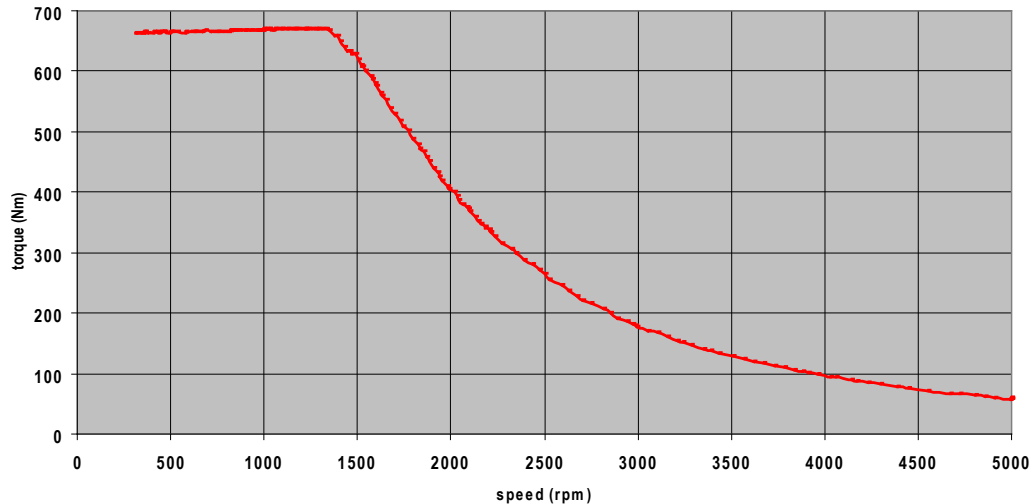

### Power-Speed Envelope

AC90 Power vs. Speed  
600A peak, 312VDC

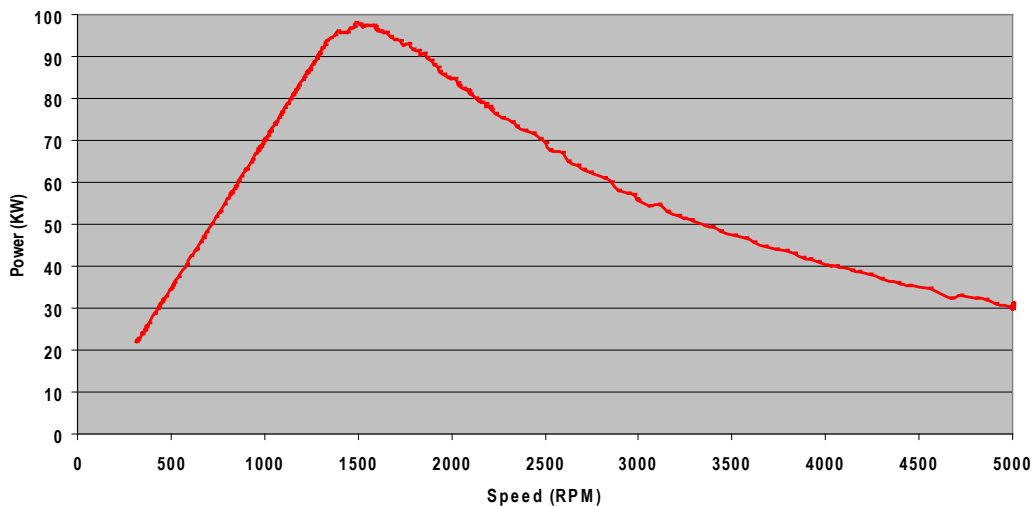


*We drive a world of difference*


For further information on AZD's Force Drive Systems contact Beth Silverman, Sales Manager  
781.932.9009 Ext. 224 [sales@azuredynamics.com](mailto:sales@azuredynamics.com) or call toll free 877.932.9009

## AC90 Motor with DMOC645 Controller

### Low Speed Torque vs. RPM

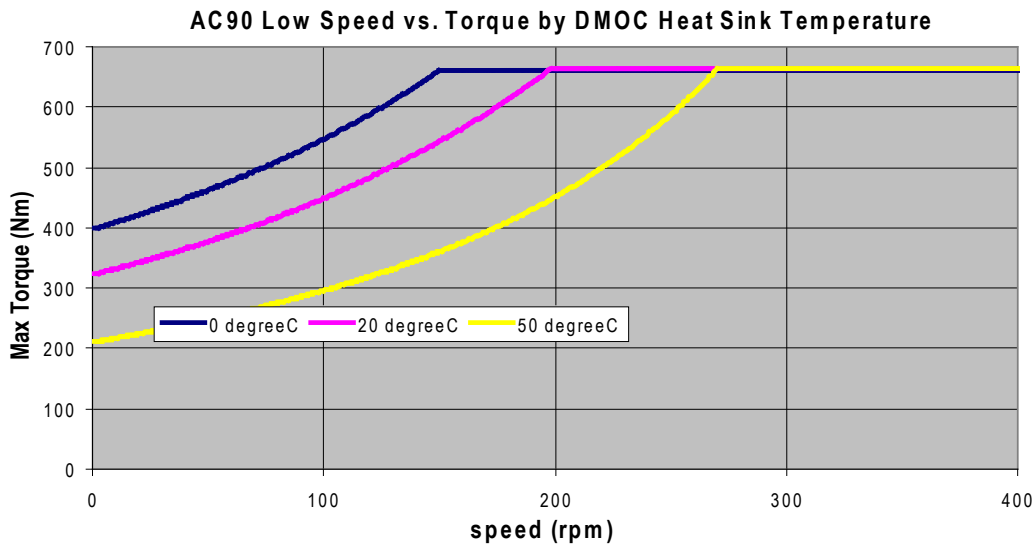

### Efficiency vs. Torque

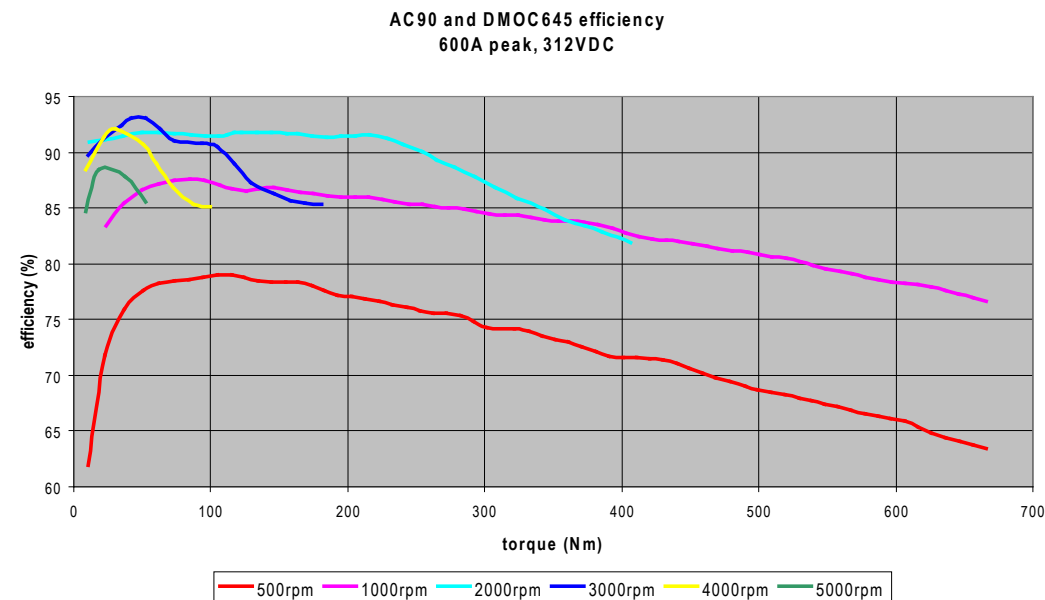

*We drive a world of difference*

For further information on AZD's Force Drive Systems contact Beth Silverman, Sales Manager  
781.932.9009 Ext. 224 [sales@azuredynamics.com](mailto:sales@azuredynamics.com) or call toll free 877.932.9009

Technical drawing of the sensor cable assembly. The drawing shows a side view of the sensor head with a cable extending from it. Dimensions are provided in millimeters (mm) in brackets and inches (in) in parentheses. The cable length is indicated as approximately 84 feet (2560.32 meters).

Dimensions:

- Top cable length:  $[1981.2]$  mm ( $78$  in)
- Bottom cable length:  $[266.7]$  mm ( $\varnothing 10.5$  in)
- Top cable diameter:  $[47.6]$  mm ( $\varnothing 1.875$  in)

SENSOR CABLE APPROXIMATE  
FREE LENGTH (84 [2133.6])



Last modified 02/11/08

# Azure Dynamics Electric Drive Solutions

## AC90 Motor

- NOTES:**
1. SPEED SENSOR / TEMPERATURE SENSOR CABLE CONNECTOR - AMP PART NUMBER 776273-1
  2. SEE TABLE FOR SENSOR CABLE PIN DESIGNATION
  3. MOTOR PHASE CONNECTOR - CROUSE-HINDS PART NUMBERS:  
EZ1016-8354 (GREEN)  
EZ1016-8355 (WHITE)  
EZ1016-8356 (BLUE)
  4. SEE TABLE FOR MOTOR PHASE CONNECTION DESIGNATION
  6. SPEED SENSING PROVIDED BY QUADRATURE SENSOR - CONTREX PART NUMBER 7200 0992 AND 60 TOOTH SENSOR DISC.


SENSOR CONNECTOR PIN	DESIGNATION
1	CHANNEL A (SENSOR BLUE WIRE)
2	CHANNEL A - (SENSOR WHITE / BLUE WIRE)
3	CHANNEL B (SENSOR BROWN WIRE)
4	CHANNEL B - (SENSOR WHITE / BROWN WIRE)
5	SPEED SENSOR SUPPLY AND SIGNAL GROUND
6	SPEED SENSOR SUPPLY VOLTAGE
7	RESERVED
8	RESERVED
9	TEMP SENSOR
10	TEMP SENSOR
11	CABLE SHIELD
MOTOR PHASE	CONNECTOR COLOR
A	BLUE
B	WHITE
C	GREEN

*We drive a world of difference*

For further information on AZD's Force Drive Systems contact Beth Silverman, Sales Manager  
781.932.9009 Ext. 224 [sales@azuredynamics.com](mailto:sales@azuredynamics.com) or call toll free 877.932.9009

# Azure Dynamics Electric Drive Solutions

## DMOC645 Controller

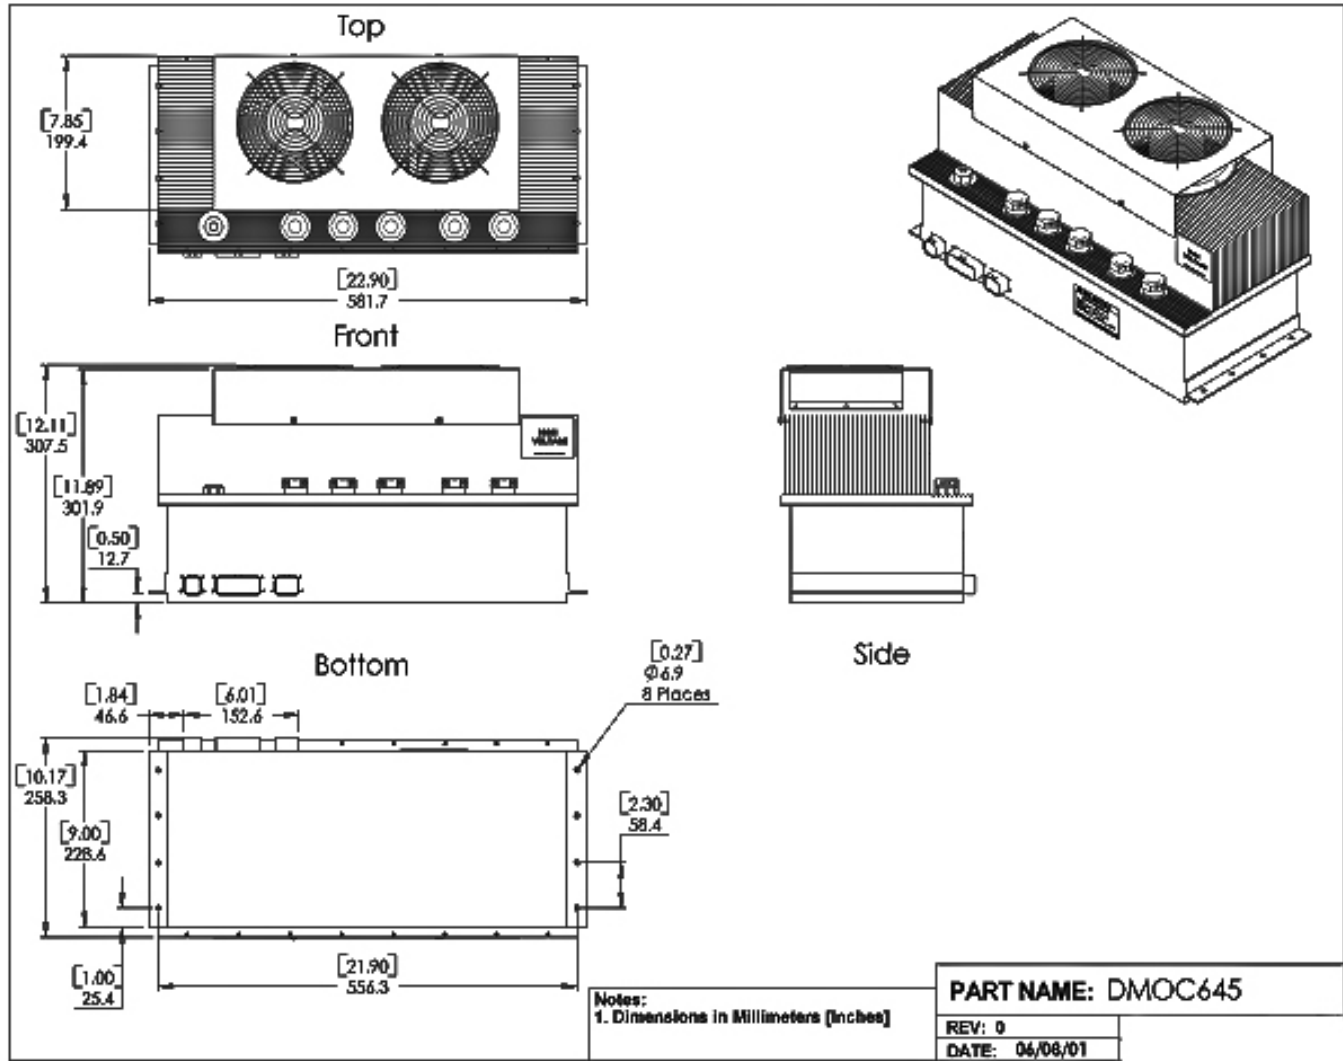

*We drive a world of difference*

For further information on AZD's Force Drive Systems contact Beth Silverman, Sales Manager  
781.932.9009 Ext. 224 [sales@azuredynamics.com](mailto:sales@azuredynamics.com) or call toll free 877.932.9009